

LNL-1100-I8


LNL-1100 Input Control Module 12 VDC; 8 zone input module

Product Overview

Lenel® SH series hardware facilitates the migration of Software House iStar Pro/C•CURE systems to Lenel access control hardware and OnGuard® software. The hardware in the Lenel SH series provides a one-for-one, plug-compatible, OnGuard ready replacement for Software House iStar Pro hardware.*

The LNL-1100-I8 Input Module provides sensor monitoring when migrating to the Lenel SH series. Lenel's LNL-1100-I8 board has 8 inputs that can be configured to support unsupervised or supervised alarm input circuits. In addition, 1 dedicated input is provided for cabinet tamper switch monitoring. The LNL-1100-I8 requires 12 VDC for power.

*Additional hardware may need to be replaced.

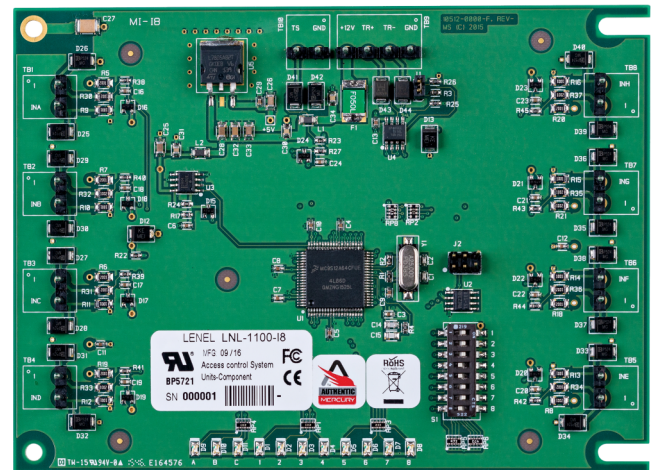

Details

- OnGuard access hardware, redesigned to retrofit Software House iStar Pro/CoCURE systems
- Replacement of Software House iStar I8 Input Module
- 12 VDC input power
- 8 programmable supervised or non-supervised inputs
- Custom End-of-Line (EOL) resistors configurable via host software
- Dedicated input for cabinet tamper status
- On-board termination jumpers
- DIP switch-selectable addressing
- Elevator control, support for 128 floors

LNL-1100-18

LNL-1100 Input Control Module 12 VDC; 8 zone input module

Technical specifications

System

Controller type	Input/Output Module
Software compatibility	OnGuard
Software compatibility version	V7.3
Elevator control	Yes
Elevator control max no. of floors	128
Max. no. of memory	---
PCB only	Yes
LCD intrusion keypad	No

Inputs/outputs

Max no. of inputs	8
-------------------	---

Electrical

Operating voltage	12 V
Power supply type	VDC

Physical


Physical dimensions	150 x 110 x 17 mm
Net weight	77 g
Shipping weight	377 g

Environmental

Operating temperature	0 to +50°C
Storage temperature	-55 to +85°C
Relative humidity	5 to 95% non-condensing

Standards & regulation

Compliance	CE, FCC, RoHS, UL 294
------------	-----------------------

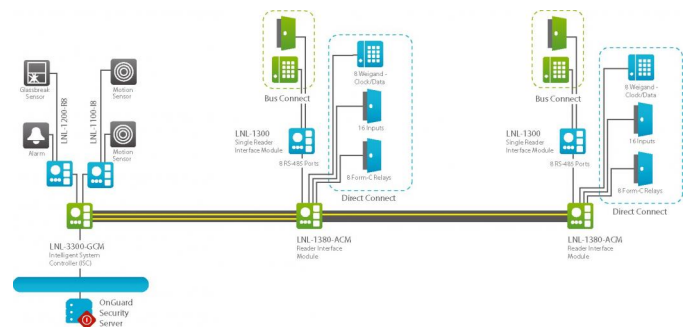

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

