




1386-LGGMN

ISO Prox II Graphics Quality Both Sides - standard card includes, 26 bit format, plain white glossy finish for direct card printing on front and back, printed ID number and No gaps in

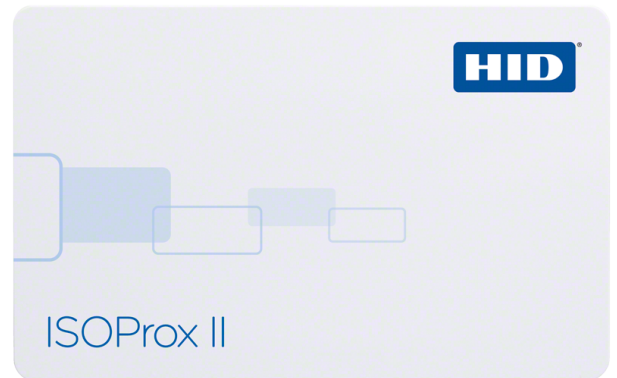

1386-LGGMN

ISO Prox II Graphics Quality Both Sides - standard card includes, 26 bit format, plain white glossy finish for direct card printing on front and back, printed ID number and No gaps in

Technical specifications

Technology

Credential type	Proximity
Credential operating frequency	125 KHz
Support technology	125 HID Prox KHz

System

Reading distance	more than 20 cm
Card slot punch	No

Printing

Direct surface printing	Yes
Thermal transfer printing	Not recommended

Ordering information

Minimum order quantity	100
Special card order form required	Yes

Physical

Surface cover	Glossy
Material	PVC
Form factor	CR80 (Credit)
Physical dimensions	54 x 86 x 1 mm
Net weight	5 g
Shipping weight	20 g
Colour	White

Environmental

Operating temperature	-45 to 70°C
Storage temperature	-45 to 70°C
Relative humidity	5 to 95% noncondensing

Standards & regulation

Compliance	RoHS
------------	------

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 25 July 2019 - 13:20

