


2000CG1NN

HID iCLASS Contactless Smart Card 2k bits with 2 application areas, 13.56 MHz, direct printable F-GLOSS, ISO standard dimensions, non-programmed use iCLASS SE encoder, no

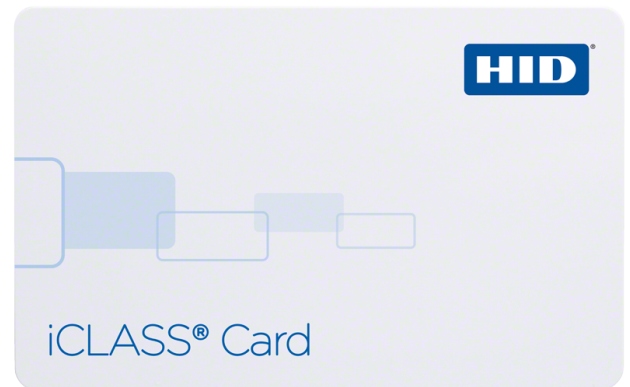

2000CG1NN

HID ICLASS Contactless Smart Card 2k bits with 2 application areas, 13.56 MHz, direct printable F-GLOSS, ISO standard dimensions, non-programmed use iCLASS SE encoder, no

Technical specifications

Technology

Credential type	Smart card
Credential operating frequency	13.56 MHz
Support technology	iCLASS (CSN), iCLASS (custom data) 13,56 MHz

System

Reading distance	5 to 10 cm
Memory size	2 kB
Card slot punch	No

Printing

Direct surface printing	Yes
Thermal transfer printing	Yes

Ordering information

Minimum order quantity	100
Special card order form required	No

Physical

Surface cover	Glossy
Material	PVC
Form factor	CR80 (Credit)
Physical dimensions	54 x 86 x 1 mm
Net weight	5 g
Shipping weight	13 g
Colour	White

Environmental

Operating temperature	-40 to 70°C
Storage temperature	-40 to 70°C
Relative humidity	5 to 95% noncondensing

Standards & regulation

Compliance	RoHS
------------	------

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 25 July 2019 - 13:20

