



Product data sheet

LNL-1200-R8


LNL-1200 Output Control Module 12 VDC; 8 relay output control module

Product Overview

Lenel® SH series hardware facilitates the migration of Software House iStar Pro/C•CURE systems to Lenel access control hardware and OnGuard® software. The hardware in the Lenel SH series provides a one-for-one, plug-compatible, OnGuard ready replacement for Software House iStar Pro hardware.*

The LNL-1200-R8 Output Control Module provides output relays when migrating to the Lenel SH series. Lenel's LNL-1200-R8 board has 8 Form-C contact relays. In addition, 1 dedicated input is provided for cabinet tamper switch monitoring. The LNL-1200-R8 requires 12 VDC for power.

*Additional hardware may need to be replaced.

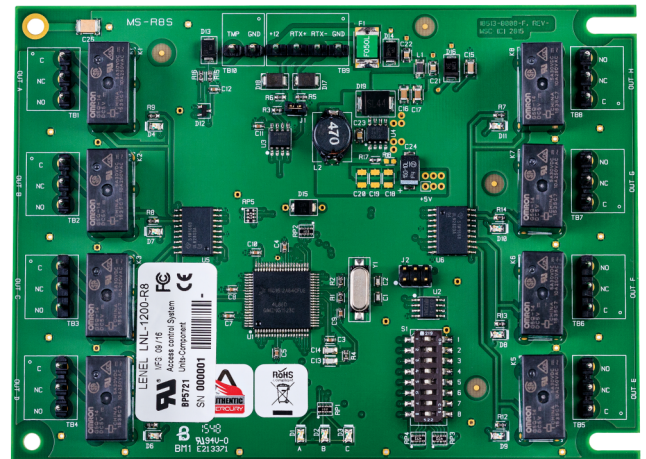

Details

- OnGuard access hardware, redesigned to retrofit Software House iStar Pro/CoCURE systems
- Replacement of Software House iStar R8 Output Module
- 8 Form-C 2 A, 30 VAC/VDC contacts for load switching
- 12 VDC input power
- 1 dedicated digital input for tamper failure status
- RS-485 communication, multi-dropped (2-wire RS-485)
- DIP switch-selectable addressing
- Status LEDs for communication to the host, heartbeat and relay status
- Elevator control, support for 128 floors

LNL-1200-R8

LNL-1200 Output Control Module 12 VDC; 8 relay output control module

Technical specifications

System

Controller type	Input/Output Module
Software compatibility	OnGuard
Software compatibility version	V7.3
Elevator control	Yes
Elevator control max no. of floors	128
Max. no. of memory	---
PCB only	Yes
LCD intrusion keypad	No

Inputs/outputs

Max no. of inputs	1
Max no. of outputs	8

Electrical

Operating voltage	12 V
Power supply type	VDC

Physical


Physical dimensions	151 x 110 x 17 mm
Net weight	77 g
Shipping weight	377 g

Environmental

Operating temperature	0 to +50°C
Storage temperature	-55 to +85°C
Relative humidity	5 to 95% noncondensing

Standards & regulation

Compliance	CE, FCC, RoHS, UL 294
------------	-----------------------

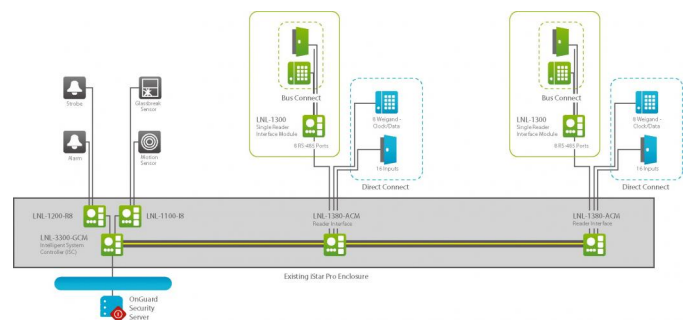

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

